

KT-1 KT-1 Ethernet-Ready one door controller



KT-1

KT-1-PCB*

Features That Make a Difference:

- Supports two readers (entry and exit)
- Configurable in two different modes: Provides advanced access control features when used with EntraPass Security Software or basic door security in Standalone Mode
- Plug & play installation
- Single capacitive touch button for fast controller enrollment (using EntraPass Security Software)
- Interchangeable connections for easy install or replacement
- Flexible power input – Power over Ethernet (PoE), PoE+ or 12 VDC
- Intrusion arming/disarming using relays (using EntraPass Security Software)
- Built-in electronic tamper
- Choose from single gang mount (KT-1) or cabinet mount (KT-1-PCB) installation options
- Compatible with existing Kantech controllers including KT-300 and KT-400
- End-to-end encryption using Kantech's ioSmart reader & smart card
- Compatible with EntraPass Security Management Software v6.02 or higher

KT-1 Ethernet-ready one door controller supports two readers (entry and exit) and can be configured in two user friendly operational modes. KT-1's Standalone Mode offers basic one door security using a simple web browser and without the need to connect to a host system. Alternatively KT-1 can be used with the powerful EntraPass security management software to provide more advanced and fully integrated access control features.



KT-1 Standalone Mode

Ideal for small sites that only need basic door security, the KT-1 single door IP controller features an embedded web server which enables it to operate in a Standalone Mode – meaning no EntraPass software is required.

One combined hardware and web-based software solution

With no extra security software to purchase and install, and using an intuitive web browser for quick set up, KT-1 Standalone provides a cost-effective, yet feature rich alternative for one door security.

Responsive web-based Software

Intuitive and responsive web-based software enables you to simply manage and configure your one door security from anywhere, using a desktop or mobile device.

Standalone Set-Up Wizard

KT-1 Standalone offers the ultimate simplicity in access control installation. Simply power up KT-1; connect to a web browser; follow the quick set-up configuration wizard and your one door security is up and running in minutes.

* KT-1-PCB only available using EntraPass Security Software

Standalone Mode Parameters

Function	Limit
Users	1,000
Events	20,000
Operators	2 (Installer, Operator)
Schedules	20 (5 intervals)
Holidays	25
Action Scheduler	100
Browsers	Safari, Google Chrome, Mozilla Firefox, Internet Explorer, Microsoft Edge
Mobile Operating Software	iOS, Android (No native app)
Integrations	Basic intrusion via relays
Upgrade Path	EntraPass/ hatatrix
Languages	English, French, Spanish
Firmware version	KT-1 Standalone version 2.00 & higher. (Subject to firmware upgrade fees)

KT-1 using EntraPass

Advanced and fully integrated access control

Using EntraPass software a single KT-1 Controller can control one door or can act as a 'head IP controller', linking together 31 additional controllers under one IP connection in EntraPass. This significantly reduces the amount of IP connections required to EntraPass and reduces programming time on the software, thus creating installation cost benefits and a highly scalable solution.

One Touch for Quick Connection to EntraPass

The KT-1 controller features a capacitive touch-sensitive button for plug and play installation. Simply provide an IP connection, push a single button and you're done. There is no need to manually enter MAC/Serial numbers. With its innovative single button programming, the KT-1 is automatically detected and enrolled onto the EntraPass security management software (v6.02 and higher). Quickly connect using Universal Plug and Play (UPnP) protocol allowing the controller to be network discoverable without requiring the IP address*.

With its Ethernet port for direct network connection, its Power over Ethernet capabilities and its unique single button programming, the KT-1 controller is up and running in just a few simple steps.

Alarm Panel Integration

DSC PowerSeries, PowerSeries Neo or MAXSYS alarm panel data integration can be accomplished by connecting it to the KT-1 controller (KT-1-PCB model only). Using this controller; EntraPass Special, Corporate or Global Editions are able to receive intrusion events, view the status of zones and partitions, and program users' code. In addition the system can be armed/disarmed (single or multiple partitions) via the reader or manual operation from the workstation.

Secure and Efficient Network Communication

The KT-1 controller uses 128-bit AES encryption to ensure secure communication. It also acts as a polling device to ensure the controllers communicate with EntraPass only as required, thus reducing network traffic. Flexible options allow KT-1 to connect to EntraPass via:

- On-board IP (Ethernet) port
- RS-485 (COM1) port for communication between the EntraPass Gateway/ Kantech Network Communication Controller (KT-NCC) and KT-300/KT-400 door controllers.

EntraPass Web & Go

Combine the KT-1 controller with EntraPass security management software and the EntraPass Web and Go mobile applications to create an innovative solution that installs quickly, can be managed remotely and provides a superior user experience. Admin users can securely connect via the web or a dedicated app on their smart phone/tablet and manage common security tasks wherever they are.



*Universal Plug and Play (UPnP) feature available when KT-1 configured in either EntraPass Software Security or Standalone Mode

KT-1 Order Information

Model Number	Description
KT-1	Ethernet-ready, one door controller, single gang mount
KT-1-M	Ethernet-ready, one door controller, cabinet mount
KT-1-PCB	Ethernet-ready one door controller and metal cabinet (KT-1-CAB-M)


KT-1 Starter Kits

Model Number	Security Software	Controller(s)	Reader(s)	Other Items
SK-CE-1-RDR	EntraPass Corporate Edition	KT-1	P225XSF (1)	5 key fobs/credentials (P40KEY)
SK-CE-1M-RDR	EntraPass Corporate Edition	KT-1-M	P225XSF (1)	120V / 16 VAC 40 VA transformer (KT-PTC1640UG), 12 VDC power supply (KT-PS4085), 12V 7 AH battery (KT-BATT-12), 5 key fobs/credentials (P40KEY)
SK-SE-1-RDR	EntraPass Special Edition	KT-1	P225XSF (1)	5 Key fobs/credentials (P40KEY)
SK-SE-1M-RDR	EntraPass Special Edition	KT-1-M	P225XSF (1)	120V / 16 VAC 40 VA transformer (KT-PTC1640UG), 12 VDC power supply (KT-PS4085), 12V 7 AH battery (KT-BATT-12), 5 key fobs/credentials (P40KEY)
SK-CE-1M-SCM	EntraPass Corporate Edition	KT-1-M	KT-MUL-SC (1)	120V / 16 VAC 40 VA transformer (KT-PTC1640UG), 12 VDC power supply (KT-PS4085), 12V 7 AH battery (KT-BATT-12), 5 smart cards (MFP-2KSHL)
SK-SE-1M-SCM	EntraPass Special Edition	KT-1-M	KT-MUL-SC (1)	120V / 16 VAC 40 VA transformer (KT-PTC1640UG), 12 VDC power supply (KT-PS4085), 12V 7 AH battery (KT-BATT-12), 5 smart cards (MFP-2KSHL)

KT-1 Expansion Kits

Model Number	Controller(s)	Reader(s)	Other Items
EK-1-RDR	KT-1	P225XSF (1)	n/a
EK-1M-RDR	KT-1-M	P225XSF (1)	120V / 16 VAC 40 VA transformer (KT-PTC1640UG), 12 VDC power supply (KT-PS4085), 12V 7 AH battery (KT-BATT-12)
EK-1M	KT-1-M	n/a	120V / 16 VAC 40 VA transformer (KT-PTC1640UG), 12 VDC power supply (KT-PS4085), 12V 7 AH battery (KT-BATT-12)
EK-1M-MTM	KT-1-M	KT-MUL-MT (1)	120V / 16 VAC 40 VA transformer (KT-PTC1640UG), 12 VDC power supply (KT-PS4085), 12V 7 AH battery (KT-BATT-12)
EK-1-MTM	KT-1	KT-MUL-MT (1)	n/a
EK-1M-SCM	KT-1-M	KT-MUL-SC (1)	120V / 16 VAC 40 VA transformer (KT-PTC1640UG), 12 VDC power supply (KT-PS4085), 12V 7 AH battery (KT-BATT-12)

System Diagram - EntraPass

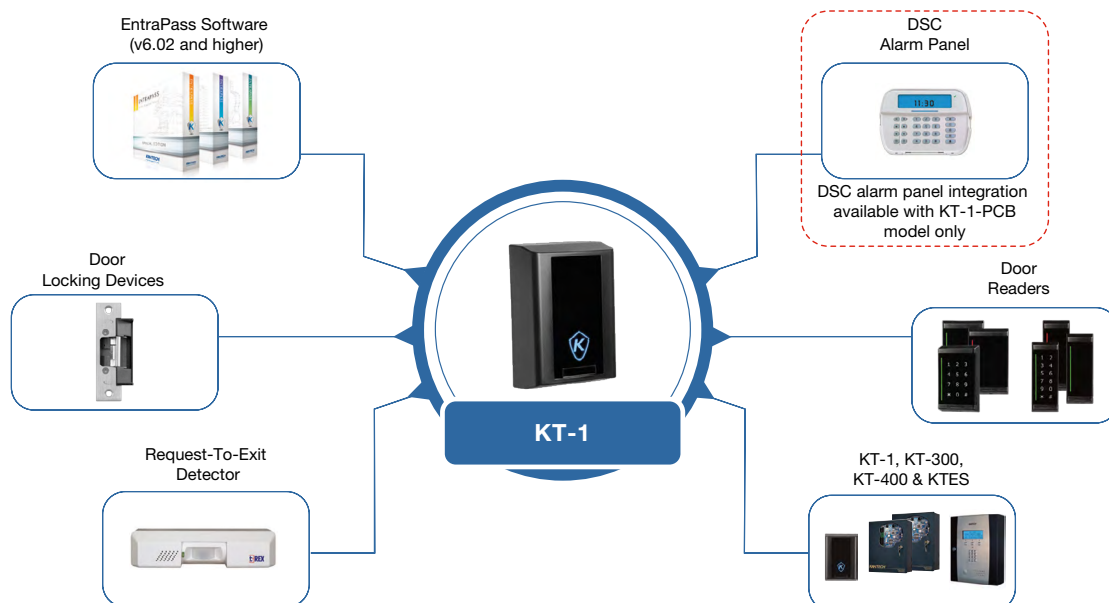

Physical

KT-1

Plastic Housing Dimensions
(H x W x D) 12.9 x 8.6 x 4.6 cm (5.1 x 3.4 x 1.8 in)
Weight 305 g (10.8 oz)

KT-1-PCB

Dimensions (H x W x D) 13.8 x 12.1 x 4.8 cm (5.4 x 4.8 x 1.9 in)
Weight 395 g (13.9 oz)

Environmental

Operating Temperature 2° to 40°C (35° to 104°F)
Operating Humidity 0% to 95% non-condensing

Electrical

KT-1/KT-1-PCB Power Input . . . 12 VDC / PoE / PoE+, 2.2 A
Reader Power Output Maximum 0.5 A @ 12 VDC, typical 250mA per reader, protected and supervised
Lock Device Power 12VDC, typical 750mA supervised (PoE+ & 12vdc power input) & 12VDC, typical 250mA supervised (PoE)

Operational

One Button Enrollment Capacitive touch-sensitive button
Reader Types Wiegand, proximity, ABA clock and data, bar code, magnetic, integrated keypad, smart card, RS-485 (Kantech Protocol)

Number of Cards in
Standalone Mode 100,000 (KT-1 and KT-1- PCB)
Monitored Points (Inputs) 4 monitored points, single EOL, double EOL (Independently programmable)
Reader Outputs LED and buzzer (25 mA maximum each, open collector outputs)
Auxiliary Outputs OUT3 and OUT4 (25 mA each, open collector outputs)
KT-1 Controlled Output Relay . . . 2 controlled output relays, 12 VDC, 25 mA each, open collector (optional relay KT-RM1 also available)

KT-1-PCB Controlled
Output Relay (R1, R2) 2 onboard form C controlled outputs relays, 30 VDC, 3 A max each
Communication Ports RS-485, Ethernet 10/100Base-T with RJ-45
Expansion Port RS-485
Auxiliary Port Auxiliary 12 VDC, 500 mA maximum
Communication Speed Up to 115,200 baud (automatic detection over RS-485); 10/100Base-T over Ethernet (configuration and events can reside for a minimum of 10 years without power)
Flash Memory 256 MB for application and data storage
RAM 128 MB for application loading and running
Network Autonomy Distributed data and processing

Model Numbers

KT-1 Ethernet-ready, one door controller, single gang mount
KT-1-M Ethernet-ready one door controller (KT-1-PCB) and metal cabinet (KT-1-CAB-M)
KT-1-PCB Ethernet-ready, one door controller, cabinet mount

Accessories

KT-1-CVR Black plastic replacement cover, fits KT-1 and KT-1-PCB
KT-1-CAB-M Black metal cabinet, fits KT-1-PCB (H x W x D) 29.9 x 28.8 x 7.7 cm (11 3/4 x 11 3/8 x 3 in)

Regulatory

EN60839-11-1 Grade 1, EN50130-4:2011, EN55022, EN60950
FCC
UL, UL-294, UL-1076
IC, NMB-003, C-Tick
CE

Warranty

5 years KT-1 hardware
KT-1-STNALONE-FW Firmware upgrade license for KT-1 Standalone Mode required for first 12 months

Related Products



DSC
Alarm Panels



ioSmart
Readers



Illustra
IP Cameras



EntraPass
Security Software

Approvals



www.kantech.com